



ACLF22100

Level 2 Charging Station Dual Connector

22kW
100 amps
ISO 15118



Adjustable Amperage delivering up to 22kW 100 amps to any EV

Features

- ✓ **Compatibility:** Dual Connector J1772 (Type 1) that can charge any vehicle on the road.
- ✓ **Compact design:** Easy installation, wall mounted, or pole mounted.
- ✓ **Safe and Reliable:** Meeting the stringent requirements of the nation's leading safety standards organization.
- ✓ **Hardware:** ACL22100 charging stations are rugged waterproof IP54 rated they can be installed outdoors or indoors, and are built to withstand the elements.
- ✓ **OCPP Networked Charging:** Receive automatic updates that deliver the latest improvements and features. Remotely monitor, manage multiple charging sites in one place, and configure stations. You can also get real-time station information, and track the charging status of all vehicles.

Input Cord

Nema 14-50

AC Power Input Rating	208/240V AC 50/60Hz
	SAE standard
	AC Level 2
AC Power Output Rating (Adjustable)	22kW / 100A
Required Service Panel Breaker	Dedicated Dual Pole 120A
Power Wiring Connector Type	3 Wire – L1,L2 plus ground Dual Connetor SAE J1772 (Type 1)

User Interface & Control

Charging Control	Plug & Play or RFID Card
Indicators	Diode Strip Light
External Communication	4G, Wi-Fi, Ethernet
OCPP Protocol	OCPP 1.6J

Safety and Operational Ratings

Storage Temperature	-40 to 75°C (-40 to 167°F) ambient
Operating Temperature	-30 to 55°C (-22 to 131°F) ambient
Operating Humidity	Up to 95% non-condensing
Cooling Method	Natural Cooling

Protection

Electrical Enclosure	Type4	CCID 20	Yes
Over Voltage Protection	Yes	Under Voltage Protection	Yes
Over Load Protection	Yes	Short Circuit Protection	Yes
Earth Leakage Protection	Yes	Ground Protection	Yes
Over-Temp Protection	Yes	Surge Protection	Yes

Mechanical


Dimension (HxWxD)	59 x 18 x 8 inch
-------------------	------------------

ACLF22100



SKU : 10225

ACLF22100

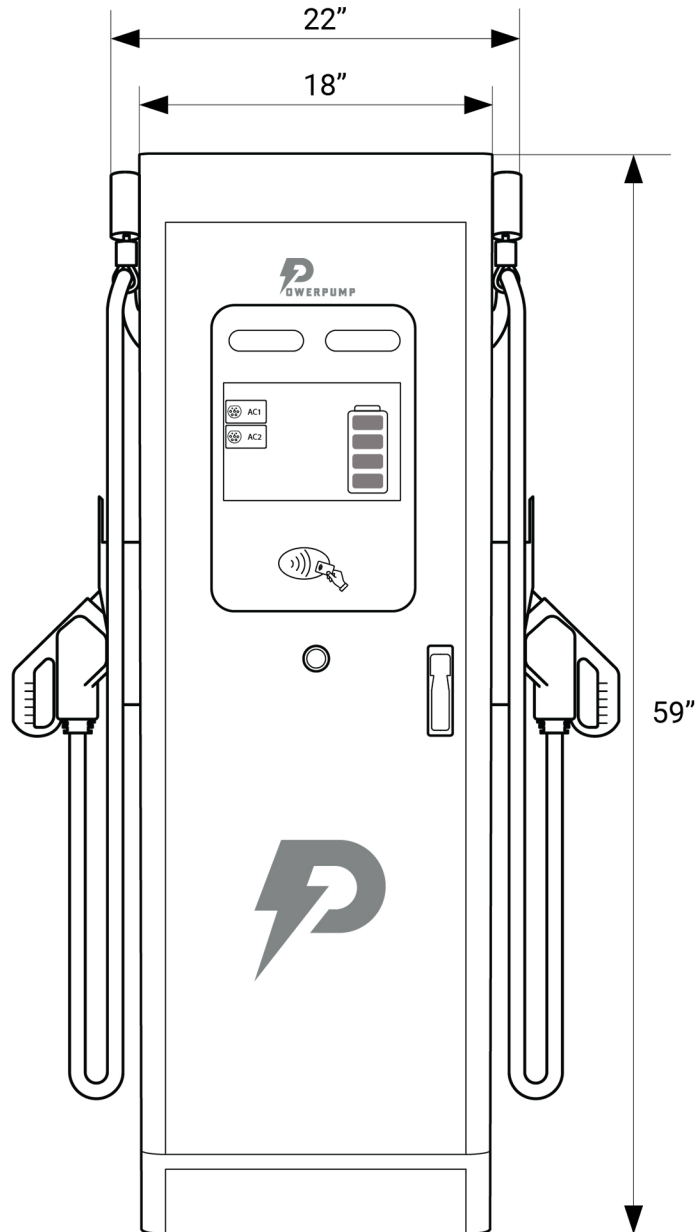

SKU : 10225